


# Haitai TaiJi (182)

## HTM540~555MH5-72

Monofacial high efficiency mono PV module

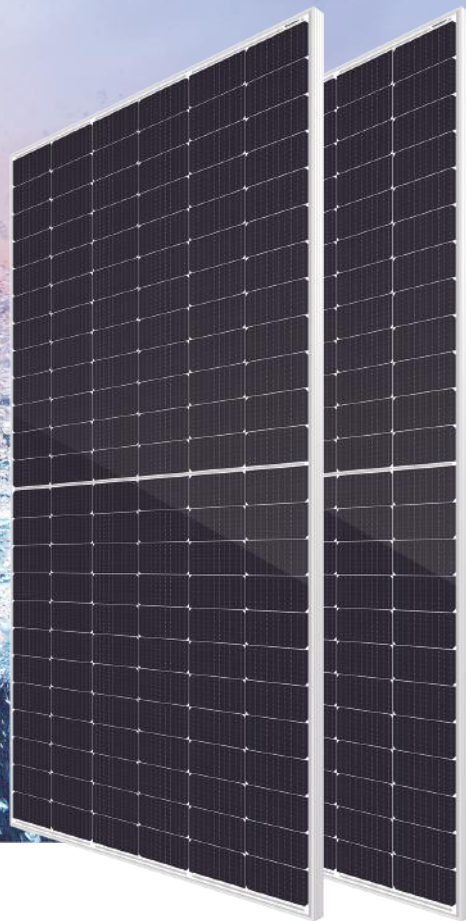

### PRODUCT FEATURES



#### High Efficiency

The multi-busbar half-cut technology can boost energy density to deliver higher output.



#### Low Degradation


First-year degradation is less than 2.0%, with linear degradation of 0.55% per year for 25 years.



#### High ROI

Effectively reducing BOS costs to achieve lower LCOE and enhanced project profitability.

### LINEAR PERFORMANCE WARRANTY

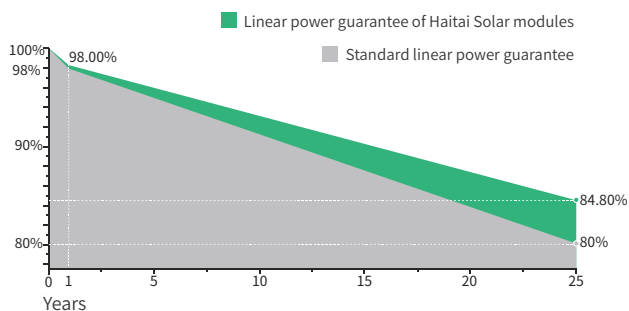

12 years product warranty



25 years linear power warranty



0.55% linear attenuation of 0.55% per year within 25 years

### CERTIFICATES

· IEC 61215, IEC 61730



## Electrical Data (STC)

Maximum Power (Pmax/W)	540	545	550	555
Open Circuit Voltage (Voc/V)	49.53	49.68	49.83	49.98
Short Circuit Current (Isc/A)	13.63	13.71	13.80	13.88
Voltage at Maximum Power (Vmp/V)	41.03	41.18	41.31	41.43
Current at Maximum Power (Imp/A)	13.17	13.24	13.32	13.4
Module Efficiency (%)	20.90	21.10	21.29	21.48
Operating Temperature	-40° C~+85° C			
Maximum System Voltage	1000/1500V			
STC (Standard Testing Conditions): Irradiance 1000W/m <sup>2</sup> , Cell Temperature 25°C, AM1.5				

## Electrical Data (NMOT)

Maximum Power (Pmax/W)	404	408	412	416
Open Circuit Voltage (Voc/V)	45.56	45.71	45.85	46.00
Short Circuit Current (Isc/A)	11.37	11.44	11.53	11.6
Voltage at Maximum Power (Vmp/V)	37.79	37.94	38.05	38.17
Current at Maximum Power (Imp/A)	10.70	10.77	10.83	10.9
NMOT (Nominal Module Operating Temperature): Irradiance 800W/m <sup>2</sup> , Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.				

## Mechanical Data

Cell Type	182×91mm Mono
Cell Orientation	144(6×24)
Module Dimensions	2278×1134×30mm
Weight	28.0kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm <sup>2</sup> positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	Stäubli Electrical: Type PV-KST4-EVO2/XY-UR; PV-KBT4-EVO2/XY-UR Jiangsu Holysun: Type C1or C2 Jiangsu TianSheng: Type TS01 or TS02
Maximum Series Fuse Rating	25A
Fire Safety Class	Class C


## Temperature Coefficients

Temperature Coefficient (Pm)	-0.340%/°C
Temperature Coefficient (Voc)	-0.270%/°C
Temperature Coefficient (Isc)	0.048%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C

## Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	720pcs	36pcs +36pcs

## Module Dimensions (mm)

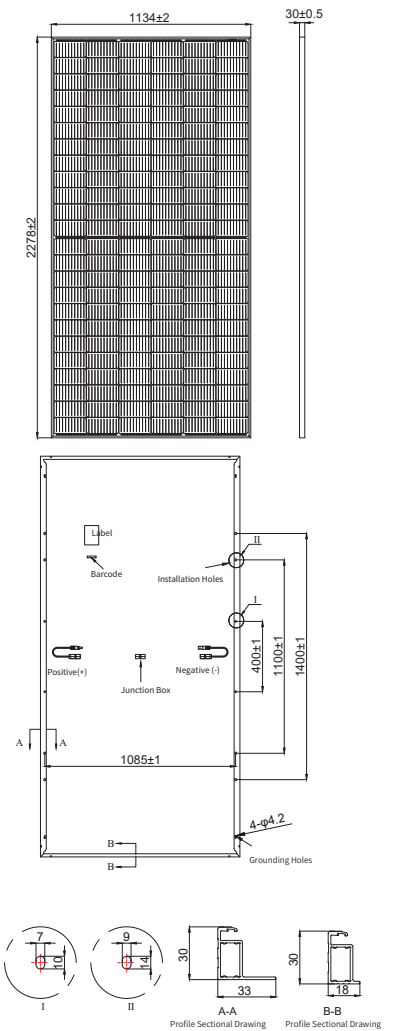

## I-V Curve

