

Haitai **TaiHe2.0** 0BB

HTM620~640DMH5-78NT

TOPCon Bifacial high efficiency PV module



PRODUCT FEATURES

High Power Output
 N-type 0BB half cut technology, improve energy density, bring higher power output.
 High Bifacial Factor, up to 25% extra power generation

High Durability
 Passed TUV Salt & Ammonia corrosion test, and 2400Pa wind load, 5400Pa snow load test, higher reliability


exquisite appearance
 The battery has no main grid design, and the overall color of the product tends to be consistent

Low Power Degradation
 First year power degradation <1.0%, year 2-30 power degradation <0.40% each year

Low Temperature coefficient
 Passivated contact cell technology for higher power generation in operating

Better Anti-LID
 N-type cells with boron-oxide-free composite LID to increase module power generation

LINEAR PERFORMANCE WARRANTY

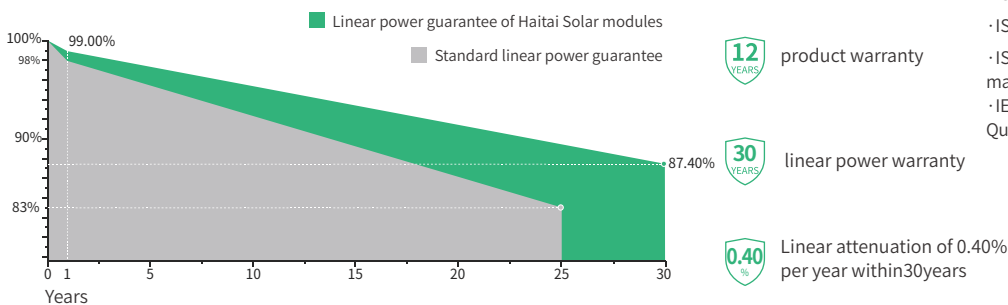

CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems
- IEC62941:2019 Photovoltaic Module Manufacturer Quality Management System

Electrical Data (STC)

Maximum Power (Pmax/W)	620	625	630	635	640
Open Circuit Voltage (Voc/V)	55.46	55.61	55.76	55.91	56.06
Short Circuit Current (Isc/A)	13.98	14.05	14.13	14.2	14.27
Voltage at Maximum Power (Vmp/V)	45.93	46.08	46.23	46.38	46.53
Current at Maximum Power (Imp/A)	13.51	13.57	13.63	13.7	13.76
Module Efficiency (%)	22.18	22.36	22.54	22.72	22.90
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C, AM1.5					

Electrical Data (NMOT)

Maximum Power (Pmax/W)	466	470	474	478	482
Open Circuit Voltage (Voc/V)	52.73	52.88	53.03	53.18	53.33
Short Circuit Current (Isc/A)	11.41	11.47	11.54	11.6	11.66
Voltage at Maximum Power (Vmp/V)	43.18	43.33	43.48	43.63	43.78
Current at Maximum Power (Imp/A)	10.8	10.85	10.91	10.96	11.01

NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.

Bifacial Power Generation Parameters (Backside Gains)

5%	Maximum Power (Pmax/W)	651	656	662	667	672
	Module Efficiency (%)	23.29	23.48	23.66	23.85	24.04
15%	Maximum Power (Pmax/W)	713	719	725	730	736
	Module Efficiency (%)	25.51	25.71	25.92	26.12	26.33
25%	Maximum Power (Pmax/W)	775	781	788	794	800
	Module Efficiency (%)	27.73	27.95	28.17	28.40	28.62

Mechanical Data

Cell Type	182×91mm
Cell Orientation	156(6×26)
Module Dimensions	2465×1134×30mm
Weight	34.5kg
Glass	2.0mm high transmittance, reinforced glass
Backsheet	2.0mm part of the structure is grid-like white ceramic glass
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector


Temperature Coefficients

Temperature Coefficient (Pm)	-0.300%/°C
Temperature Coefficient (Voc)	-0.250%/°C
Temperature Coefficient (Isc)	0.046%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C



Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	576 pcs	36 pcs +36 pcs

Module Dimensions (mm)

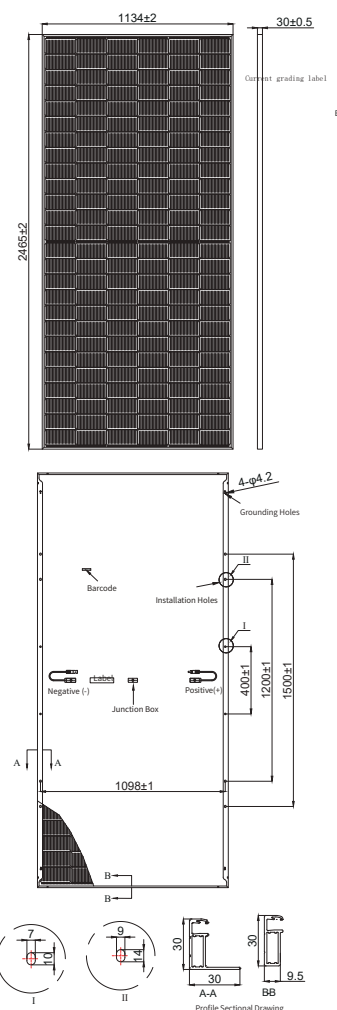

I-V Curve

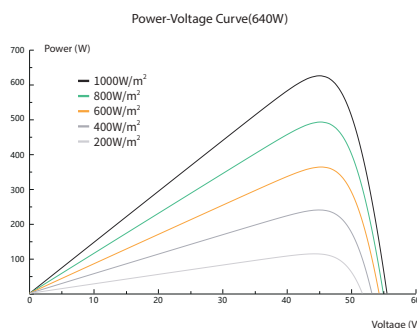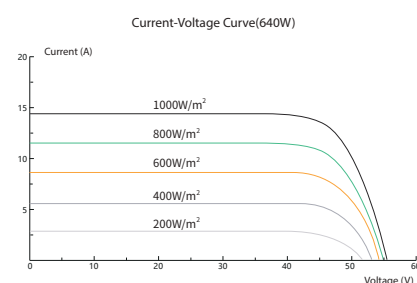

Data contained in these specifications is subject to change without notice.
Haitai Solar reserves the right to final interpretation of content.

HAITAI20240527EN