

Haitai **TaiHe2.0** 0BB

HTM580~600DMH5-72NT

TOPCon Bifacial high efficiency PV module

23.23%

Module Efficiency



PRODUCT FEATURES



High Power Output

N-type MBB half cut technology, improve energy density, bring higher power output.
High Bifacial Factor, up to 25% extra power generation



High Durability

Passed TUV Salt & Ammonia corrosion test, and 2400Pa wind load, 5400Pa snow load test, higher reliability



exquisite appearance

The battery has no main grid design, and the overall color of the product tends to be consistent



Low Power Degradation

First year power degradation <1.0%, year 2-30 power degradation <0.40% each year



Low Temperature coefficient


Passivated contact cell technology for higher power generation in operating



Better Anti-LID

N-type cells with boron-oxide-free composite LID to increase module power generation

LINEAR PERFORMANCE WARRANTY

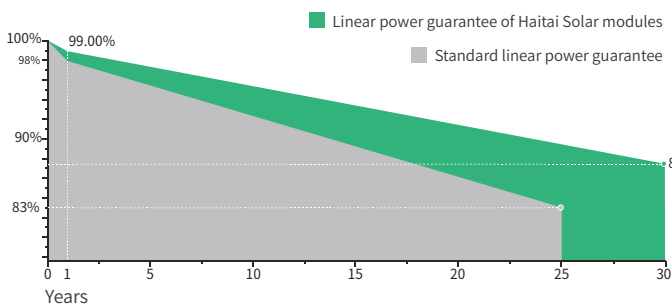

12 YEARS product warranty



30 YEARS linear power warranty



0.40% Linear attenuation of 0.40% per year within 30 years

CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems
- IEC62941:2019 Photovoltaic Module Manufacturer Quality Management System



400-0835-985

Web: www.haitai-solar.com E-mail: ht@htsolargroup.com



Electrical Data (STC)

Maximum Power (Pmax/W)	580	585	590	595	600
Open Circuit Voltage (Voc/V)	51.31	51.46	51.61	51.76	51.91
Short Circuit Current (Isc/A)	14.13	14.21	14.29	14.37	14.45
Voltage at Maximum Power (Vmp/V)	42.58	42.73	42.88	43.03	43.18
Current at Maximum Power (Imp/A)	13.62	13.69	13.76	13.83	13.90
Module Efficiency (%)	22.45	22.65	22.84	23.03	23.23
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C, AM1.5					

Electrical Data (NMOT)

Maximum Power (Pmax/W)	438	442	446	450	454
Open Circuit Voltage (Voc/V)	48.75	48.90	49.05	49.20	49.35
Short Circuit Current (Isc/A)	11.58	11.65	11.72	11.79	11.86
Voltage at Maximum Power (Vmp/V)	40.15	40.30	40.45	40.60	40.75
Current at Maximum Power (Imp/A)	10.91	10.97	11.03	11.09	11.15
NMOT (Nominal Module Operating Temperature): Irradiance 800W/m ² , Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.					

Bifacial Power Generation Parameters (Backside Gains)

5%	Maximum Power (Pmax/W)	609	614	620	625	630
	Module Efficiency (%)	23.57	23.78	23.98	24.18	24.39
15%	Maximum Power (Pmax/W)	667	673	679	684	690
	Module Efficiency (%)	25.82	26.04	26.27	26.49	26.71
25%	Maximum Power (Pmax/W)	725	731	738	744	750
	Module Efficiency (%)	28.07	28.31	28.55	28.79	29.03

Mechanical Data

Cell Type	182×91mm
Cell Orientation	144 (6×24)
Module Dimensions	2278×1134×30mm
Weight	32.0kg
Glass	2.0mm high transmittance, reinforced glass
Backsheet	2.0mm part of the structure is grid-like white ceramic glass
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector


Temperature Coefficients

Temperature Coefficient (Pm)	-0.300%/°C
Temperature Coefficient (Voc)	-0.250%/°C
Temperature Coefficient (Isc)	0.046%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C

Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	720 pcs	36 pcs +36 pcs

Module Dimensions (mm)

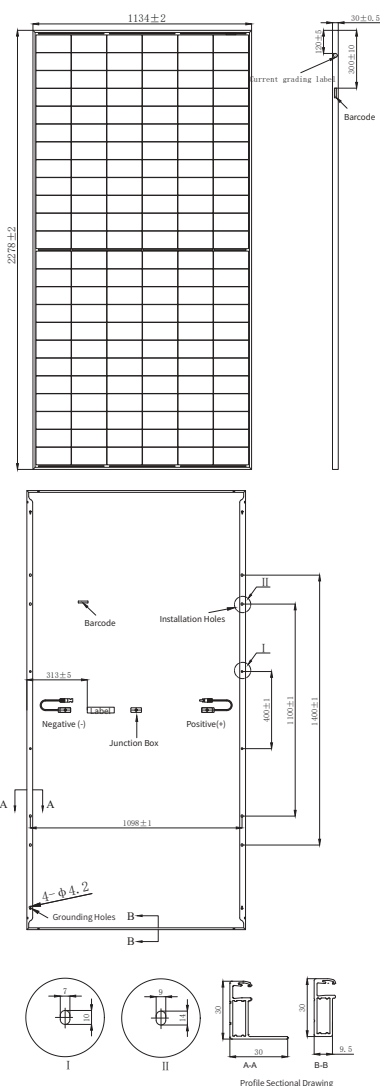

I-V Curve

